


SCS	IT	SCS	IT
	PROCUREMENT SERVICES		PROCUREMENT SERVICES
SCS	IT	Tel.: +41 61 927 92 92 verkauf@scsit.ch	
	PROCUREMENT SERVICES		

Hewlett-Packard Aruba 5406R z12 - Switch

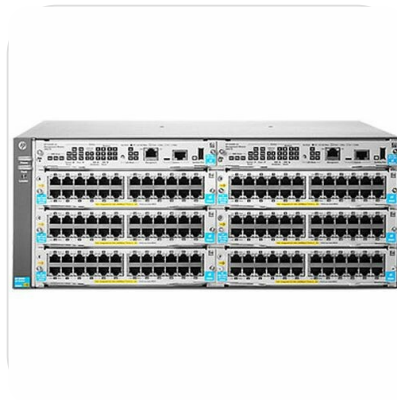

✓ Delivery time: 2- 4 days

CHF **1,801.02**

CHF **1,946.90** incl.

Aruba 5406R z12 - Switch - verwaltet - an Rack montierbar - PoE+

Manufacturer	Hewlett-Packard
EAN	0888182309025
Manufacturer#	J9821A

Description

The Aruba 5400R z12 Switch Series brings enterprise-class resiliency and innovative flexibility to mobile-first networks. This advanced Layer 3 modular switch provides scalable aggregation with HPE Smart Rate multi-gigabit ports for high-speed 802.11ac devices, Virtual Switching Framework (VSF) stacking technology, hitless failover, line rate 40GbE, robust QoS and security and requires no software licensing. The 5400R is easy to deploy and manage with advanced security and network management tools like Aruba ClearPass Policy Manager, Aruba AirWave and cloud-based Aruba Central.

Specification

Product	HPE Aruba 5406R z12 - switch - Managed - rack-mountable
Description	

Device Type	Switch - Managed
-------------	------------------

Enclosure Type	Rack-mountable 4U
----------------	-------------------

Subtype	Gigabit Ethernet
---------	------------------

Power Over Ethernet (PoE)	PoE+
Performance	Throughput: 392.8 Mbps Routing/switching capacity: 528 Gbps Switching fabric bandwidth: 1015 Gbps
Capacity	IPv4 routing table entries: 10000 IPv6 routing table entries: 5000
MAC Address Table Size	64K entries
Routing Protocol	OSPF, RIP-1, RIP-2, BGP, IGMP, OSPFv2, static IP routing, IGMPv3, OSPFv3
Remote Management Protocol	SNMP 1, RMON 2, RMON, SNMP 3, SNMP 2c, HTTP, SSH-2, CLI, XRMON
Features	VLAN support, auto-uplink (auto MDI/MDI-X), IGMP snooping, half duplex mode, full duplex mode, sFlow, VRRP support, ACL support, QoS, MLD snooping, STP Root Guard, UDLD, Rapid PVST+, LLDP support, Port Security, DHCP protection, CoS, sFlow v5, GARP, ToS
Compliant Standards	IEEE 802.1Q, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3af, IEEE 802.3ad (LACP), IEEE 802.1x, IEEE 802.1s, IEEE 802.1ad, IEEE 802.1v, IEEE 802.1ab (LLDP), IEEE 802.3at, IEEE 802.3az
Dimensions (WxDxH)	44.45 cm x 45.09 cm x 17.53 cm
Weight	11.11 kg
Manufacturer Warranty	Limited lifetime warranty

Techn. Details

Device Type	Switch - Managed
Enclosure Type	Rack-mountable 4U
Subtype	Gigabit Ethernet
Power Over Ethernet (PoE)	PoE+
Performance	Throughput: 392.8 Mbps Routing/switching capacity: 528 Gbps Switching fabric bandwidth: 1015 Gbps
Capacity	IPv4 routing table entries: 10000 IPv6 routing table entries: 5000
MAC Address	64K entries

Table Size

Routing Protocol	OSPF, RIP-1, RIP-2, BGP, IGMP, OSPFv2, static IP routing, IGMPv3, OSPFv3
Remote Management Protocol	SNMP 1, RMON 2, RMON, SNMP 3, SNMP 2c, HTTP, SSH-2, CLI, XRMON
Encryption Algorithm	SSL
Authentication Method	RADIUS, TACACS+, Secure Shell v.2 (SSH2)
Features	VLAN support, auto-uplink (auto MDI/MDI-X), IGMP snooping, half duplex mode, full duplex mode, sFlow, VRRP support, ACL support, QoS, MLD snooping, STP Root Guard, UDLD, Rapid PVST+, LLDP support, Port Security, DHCP protection, CoS, sFlow v5, GARP, ToS
Compliant Standards	IEEE 802.1Q, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3af, IEEE 802.3ad (LACP), IEEE 802.1x, IEEE 802.1s, IEEE 802.1ad, IEEE 802.1v, IEEE 802.1ab (LLDP), IEEE 802.3at, IEEE 802.3az
Expansion Slots	6 (total) / 6 (free) x Expansion Slot
Power Device	Internal power supply (not installed)
Max Supported Qty	2
Included Accessories	Fan tray
Rack Mounting Kit	Included
Compliant Standards	FCC Class A certified, CISPR 22 Class A, CISPR 24, EN 60950, EN 61000-3-2, IEC 61000-3-2, IEC 61000-3-3, IEC 61000-4-11, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 60950, EN 61000-3-3, EN55024, UL 60950, CSA 22.2 No. 60950, FCC Part 15, EN 61000-4-11, EN 55022 Class A
Width	44.45 cm
Depth	45.09 cm
Height	17.53 cm
Weight	11.11 kg
Service & Support	Limited warranty - replacement - lifetime - response time: next business day Technical support - phone consulting - lifetime
Min Operating Temperature	0 °C

Max Operating Temperature	45 °C
---------------------------------	-------

Humidity Range Operating	15 - 95% (non-condensing)
--------------------------------	---------------------------

Min Storage Temperature	-40 °C
----------------------------	--------

Max Storage Temperature	70 °C
----------------------------	-------

Humidity Range Storage	15 - 95% (non-condensing)
------------------------------	---------------------------

Andere Kunden bestellten auch...



Hewlett-Packard HPE Common Slot High

HPE Common Slot High Efficiency - Stromversorgung Hot-Plug (Plug-In-Modul) - 460 Watt

CHF **79.00**

CHF **85.40** incl.