


SCS IT	SCS IT
PROCUREMENT SERVICES	PROCUREMENT SERVICES
SCS IT	Tel.: +41 61 927 92 92 verkauf@scsit.ch
PROCUREMENT SERVICES	

BenQ Multi-Touchscreen Interactive

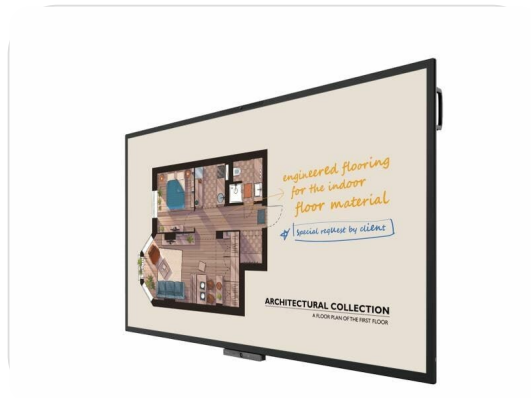

✓ Delivery time: 2- 4 days

CHF **1,709.34**

CHF **1,847.80** incl.

BenQ Multi-Touchscreen Interactive Panel CP6501K - Bildschirmdiagonale 65" - Auflösung 3840 x 2160 (4K UHD) - AntiGlare Panel - Kapazitiv 20 Touch - IPS 10bit - Android OS - 1x OPS Slot - Betriebsdauer 18/7

Manufacturer	BenQ
EAN	4718755079290
Manufacturer#	9H.F5MTC.DE1

Description

BenQ DuoBoard is designed to tap into the dynamic possibilities of the modern meeting room and help businesses develop and maintain an environment where ideas flow freely. It allows for extended, seamless team collaboration, stimulating more innovative ideas and is perfect for fostering collaboration then turning your creativities from abstract to real. BenQ DuoBoard is the beginning of infinite possibilities.

Specification

Product Description	BenQ DuoBoard CP6501K CP Series - 65" LED-backlit LCD display - 4K - for digital signage
Product Type	LED-backlit LCD flat panel display with touchscreen (multi touch) / microphone / camera
Diagonal Class	65"
Commercial Use	Yes - digital signage
Colour	Black

Resolution	3840 x 2160
Display Format	4K UHD (2160p)
Video Interface	HDMI
HDMI Ports Qty	3 ports
Connectivity	LAN
PC Interface	VGA (HD-15)
Technology	IPS
LCD Backlight Technology	Direct-lit LED
Image Aspect Ratio	16:9
TV Tuner	No tuner
Picture Enhancements	68% Colour Gamut NTSC
Speaker System	2 speakers, subwoofer
Storage Capacity	32 GB
USB	7 ports
Included Accessories	Remote control, wall mount, 2 pens
Voltage	AC 120/230 V (50/60 Hz)
Power Consumption Operational	210 Watt
Power Consumption Stand by	0.5 Watt
Dimensions (WxDxH) - without stand	150.3 cm x 8.5 cm x 90.9 cm
Weight	43.2 kg
Manufacturer Warranty	3-year warranty

Techn. Details

Product Type	LED-backlit LCD flat panel display
Power Consumption Operational	210 Watt
Diagonal Class	65"

Commercial Use	Yes - digital signage
Combined With	Touchscreen (multi touch) / microphone / camera
Series	CP Series
TV Tuner	No tuner
TV Tuner Presence	No
Sensors	Light sensor, motion sensor, NFC sensor, Infrared (IR), air quality sensor
Video Interface	HDMI
HDMI Ports Qty	3 ports
PC Interface	VGA (HD-15)
Modes	Portrait mode, landscape mode
Picture Enhancements	68% Colour Gamut NTSC
Protection	Tempered glass protection
Dimensions	Without stand
Width	150.3 cm
Depth	8.5 cm
Height	90.9 cm
Weight	43.2 kg
Enclosure Colour	Black
LCD Display Technology	IPS
Resolution	3840 x 2160
Display Format	4K UHD (2160p)
Image Aspect Ratio	16:9
LCD Backlight	Direct-lit LED

Technology	
Coating	Anti-glare
Image Contrast Ratio	5000:1
Brightness	320 cd/m ²
Viewing Angle	178 degrees
Viewing Angle (Vertical)	178 degrees
Touchpoints Qty	20
Response Time	8 ms
Display Menu Language	Danish, Czech, Chinese (traditional), Chinese (simplified), English, German, French, Italian, Norwegian, Portuguese, Polish, Finnish, Swedish, Russian, Spanish, Dutch, Greek, Turkish, Arabic, Romanian, Japanese
Backlight Life	30,000 hours
Features	Multiple Display Administrator (MDA), Display Management System (DMS), OPS Slot, Projected Capacitive Technology (PCAP), Duo Window, Duo Board, Duo OS
Flat Panel Mount Interface	600 x 400 mm
VESA Compatibility	Yes
USB Port	Yes
USB Ports Qty	7
Configuration	32 GB
Type	Remote control
Speaker System	2 speakers, subwoofer
Output Power / Total	36 Watt
Features	Built-in 6 array microphones
Speakers	2 x main channel speaker - 10 Watt 1 x subwoofer - 16 Watt
Connectivity	LAN

Connector Type	3 x HDMI input HDMI output Audio line-in / microphone VGA input Audio line-out LAN SPDIF output 3 x USB 3.0 4 x USB 2.0 RS-232 2 x USB
Included Accessories	Wall mount, 2 pens
Cables Included	VGA cable - 5 m HDMI cable - 1.5 m USB cable - 3 m
Power Device	Power supply
Input Voltage	AC 120/230 V (50/60 Hz)
Power Consumption Stand by	0.5 Watt
Service & Support	Limited warranty - screen exchange - 3 years - on-site
Weight (Shipping)	58.5 kg
Min Operating Temperature	0 °C
Max Operating Temperature	40 °C

Related Prod.

Wireless Präsentation Systeme (4)

	EZCast Präsentations-System Pro Dongle II, Übertragungsart: WLAN, Auflösung: 3840 x 2160 (Ultra HD 4K), Anschluss: HDMI 	CHF 140.10 CHF 151.45 incl.
	ClickShare CX-50 Base Station with 2 USB-C Buttons NEW BULK 	CHF 2,488.02 CHF 2,689.55 incl.
	Quattropod Präsentations-System QuattroPod Deluxe, Auflösung: 4096 x 2160 (4K), Anschluss: HDMI, Übertragungsart: WLAN 	CHF 1,231.59 CHF 1,331.35 incl.

AV-Extender

	PureLink Sender/Empfänger CSW200 4K Wireless HDMI Extender, Art: Transmitter, Schnittstellen: HDMI 	CHF 308.51 CHF 333.50 incl.
	PureLink Extender PT-HDBT-1002 Set, Art: HDBaseT Set, Schnittstellen: HDBaseT, HDMI, RS-232, USB 	CHF 503.93 CHF 544.75 incl.

Video-Kabel (20)



PureLink Standard Speed HDMI Verbindungskabel
15m, Typ: Verbindungskabel, Videoanschluss Seite A:
HDMI, Videoanschluss Seite B: HDMI, Farbe: Schwarz,
Länge: 15 m

CHF **83.86**
CHF **90.65** incl.



PureLink ULS1005-015 HDMI 1,5m - schw. LSZH, Typ:
Verbindungskabel, Videoanschluss Seite A: HDMI,
Videoanschluss Seite B: HDMI, Farbe: Schwarz,
Länge: 1.5 m, Halogenfrei

CHF **29.37**
CHF **31.75** incl.



PureLink Standard Speed Verbindungskabel 10m, Typ:
Verbindungskabel, Videoanschluss Seite A: HDMI,
Videoanschluss Seite B: HDMI, Farbe: Schwarz,
Länge: 10 m

CHF **59.71**
CHF **64.55** incl.



Video Switcher und Matrix



PureTools Presentation Switcher PT-PSW-21KVM
Multiformat HDBaseT, Set, Stromversorgung: 12 V,
Max. Auflösung: 3840 x 2160 (Ultra HD 4K), Anzahl
Eingänge: 2 x, Anzahl Ausgänge: 2 x, Eingänge:
HDMI, HDBaseT, USB-C, Ausgänge: HDMI, HDBaseT

CHF **1,180.11**
CHF **1,275.70**
incl.

